



Event Building Evio Scheme

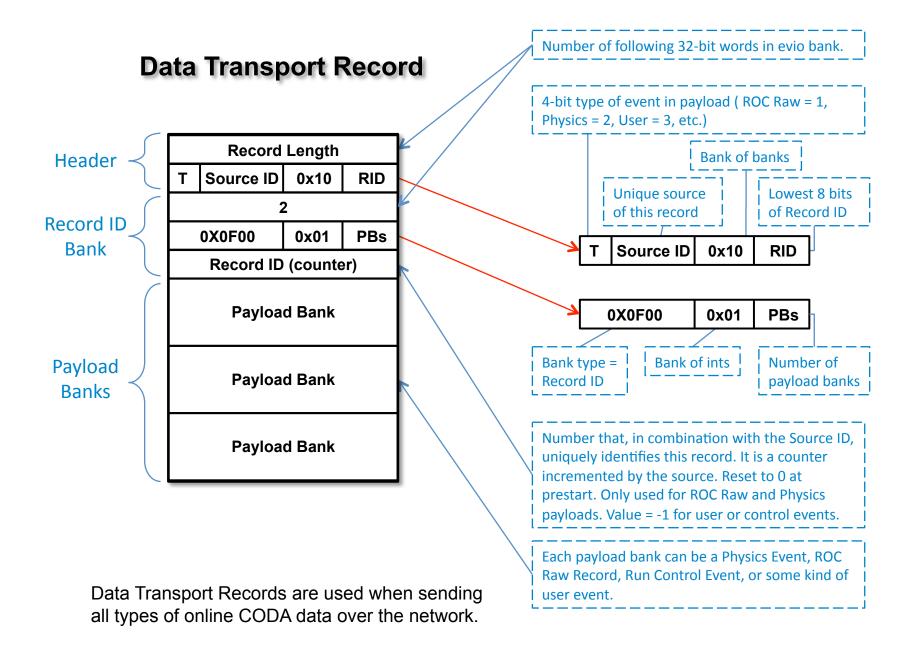

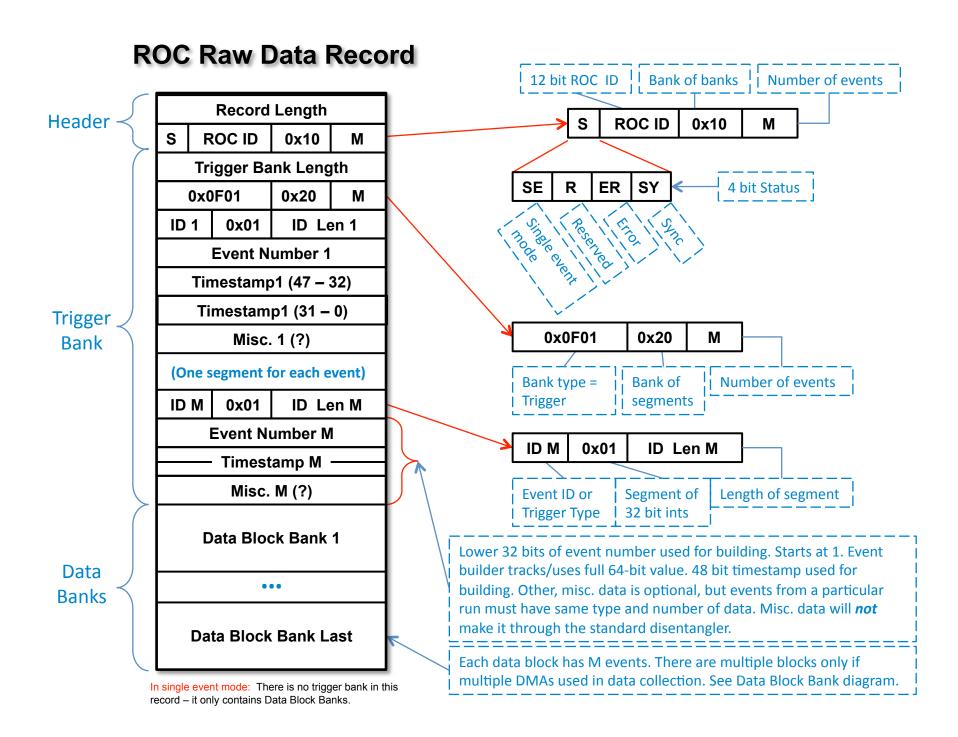


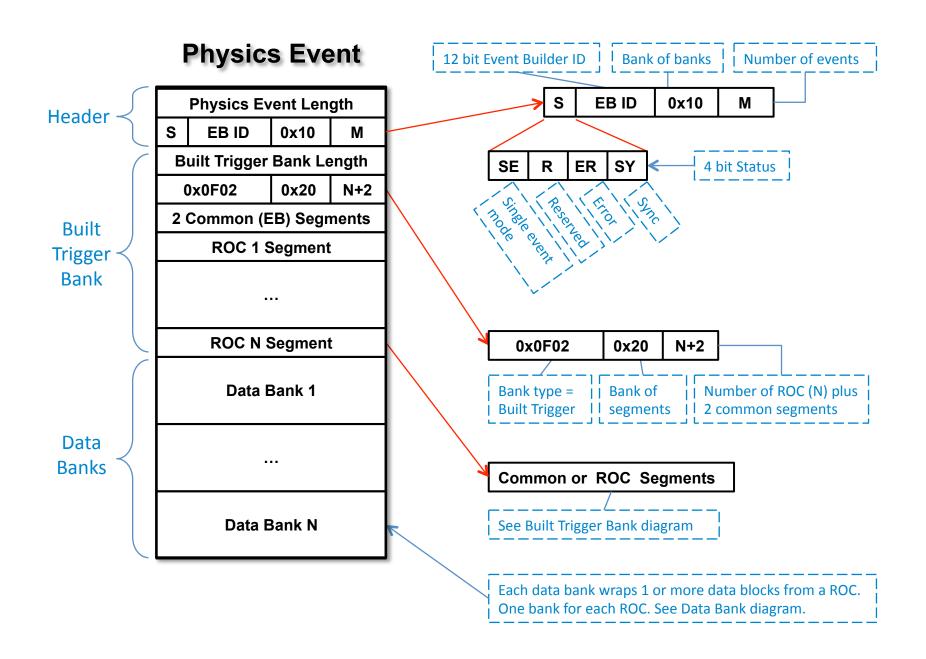


Physics Event's Built Trigger Bank

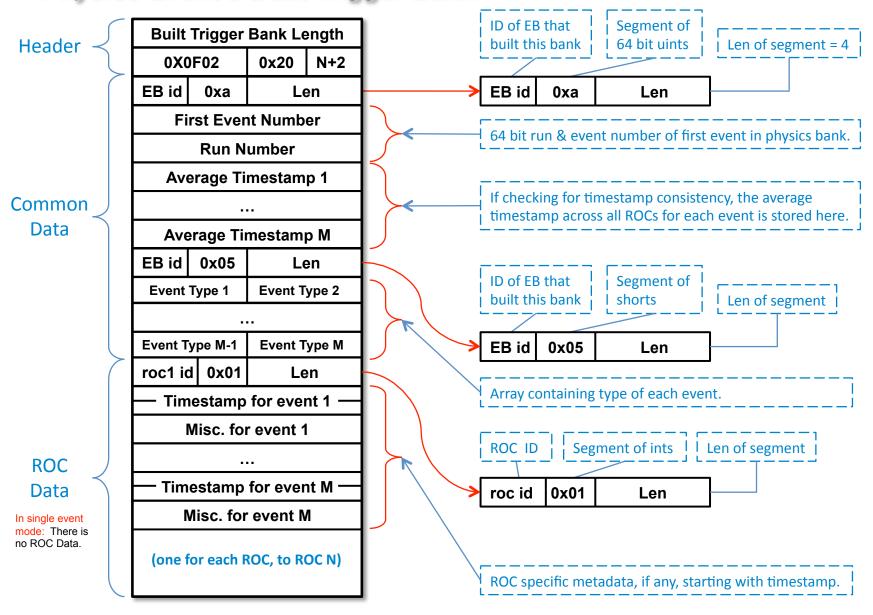

Physics Event's Data Bank

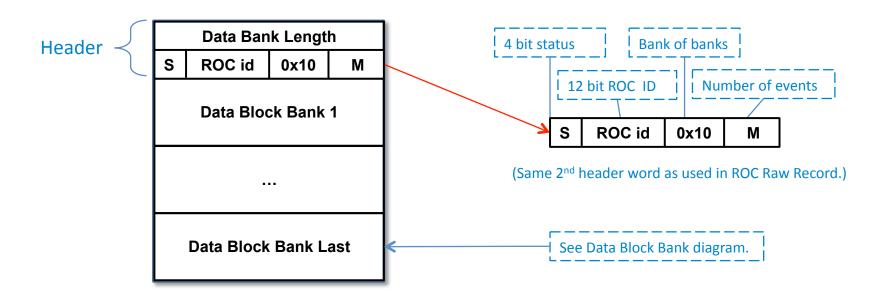

Data blocks from a single ROC are wrapped in this data bank. There should be at least one data block (only one in single event mode) and there may be more if more than one DMA is used in acquiring data for this ROC. If more than one block, each contains a fragment for every one of the M events and from unique modules. In addition, the last block may have data associated only with the last event (such as scalar data).

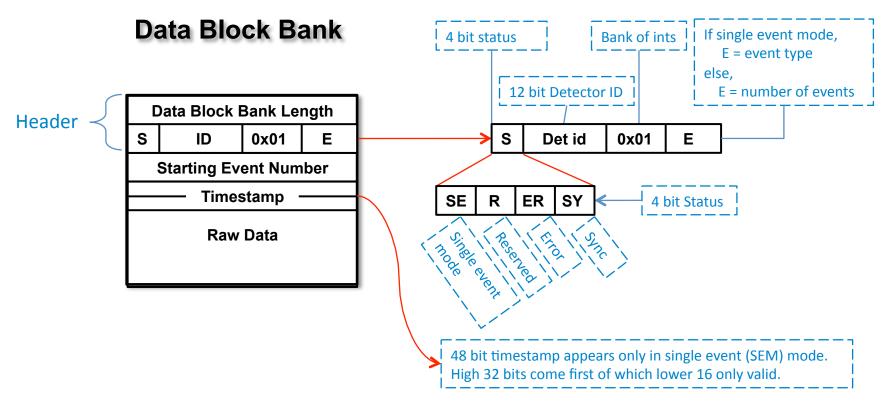

Contains raw data from a single ROC containing one or more events. If this block is the last in a data bank, and there are multiple events, and E = 1, then this data is associated only with the last event (e.g. scalar readout).

16-bit EVIO CODA-Format Tag

S ID


4 bits which can be:


- = 0 when not used (Trigger & Record ID Banks)
- 2) Status bits for ROC Raw Records, Physics Events, and Data Banks:
 - a) 4th (MSB) Single event mode
 - b) 3rd Reserved
 - c) 2nd Error
 - d) 1st (LSB) Sync
- 3) the type of payload event contained in Data Transport Record:
 - a) 1 = ROC Raw
 - b) 2 = Physics
 - c) 3 = User
 - d) 4 = Disentangled Physics
 - e) 5 = Prestart (run control)
 - f) 6 = Go (run control)
 - g) 7 = Pause (run control)
 - h) 8 = End (run control)

12 bits of identification which have:

- ROC ID for Data Transport Records, ROC Raw Records, and Data Banks
- 2) EB ID for Data Transport Records and Physics Events
- 3) for Trigger and Record ID Banks:
 - a) 0xF00 = Record ID Banks
 - b) 0xF01 = Trigger Banks
 - c) 0xF02 = Built Trigger Banks
 - d) 0xF03 = Disentangled Event Data Bank


Disentangling Built Physics Event

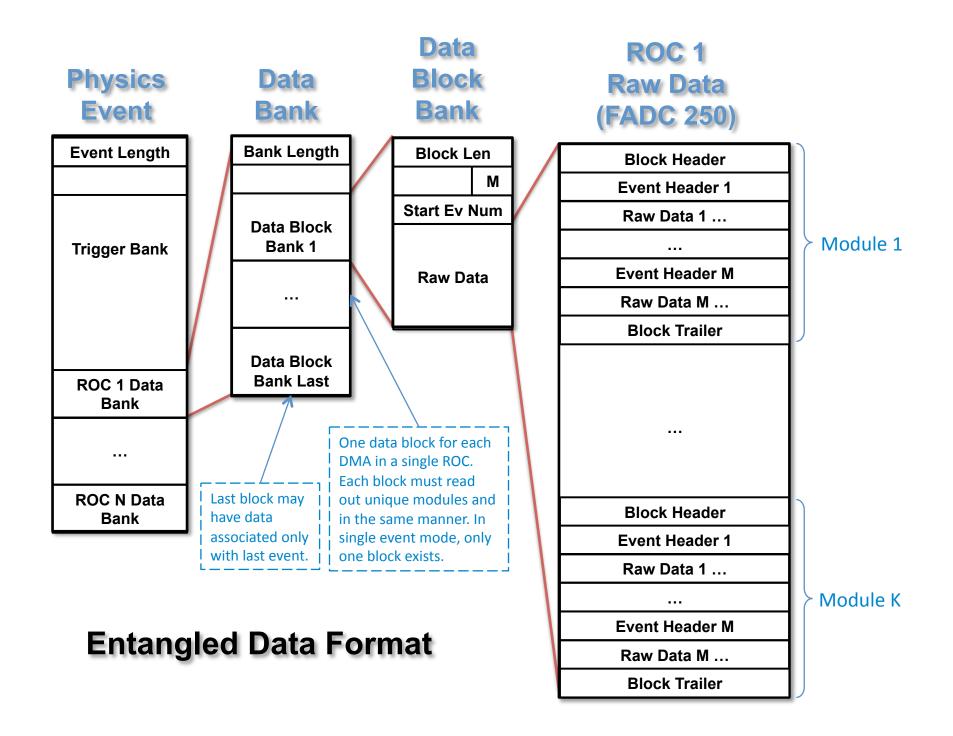

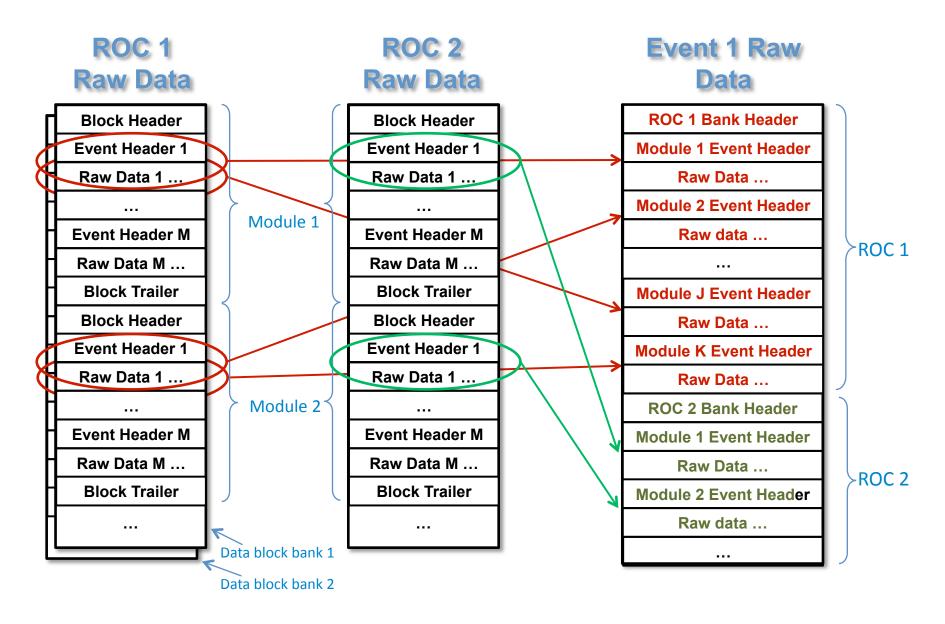


Entangled To Disentangled FADC 250 Raw Data

Disentangled Physics Event

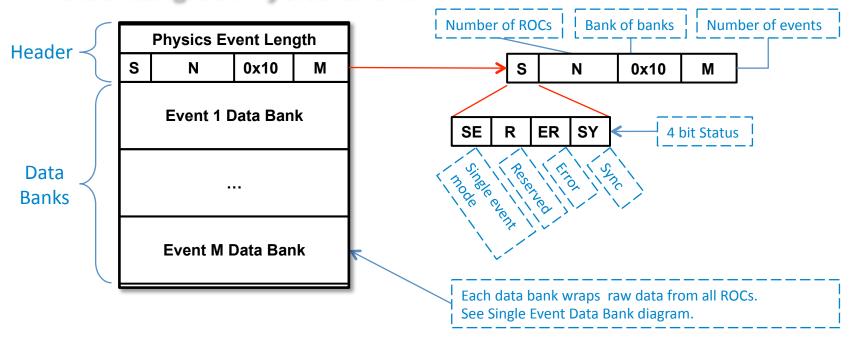

Single Event (Disentangled) Data Bank

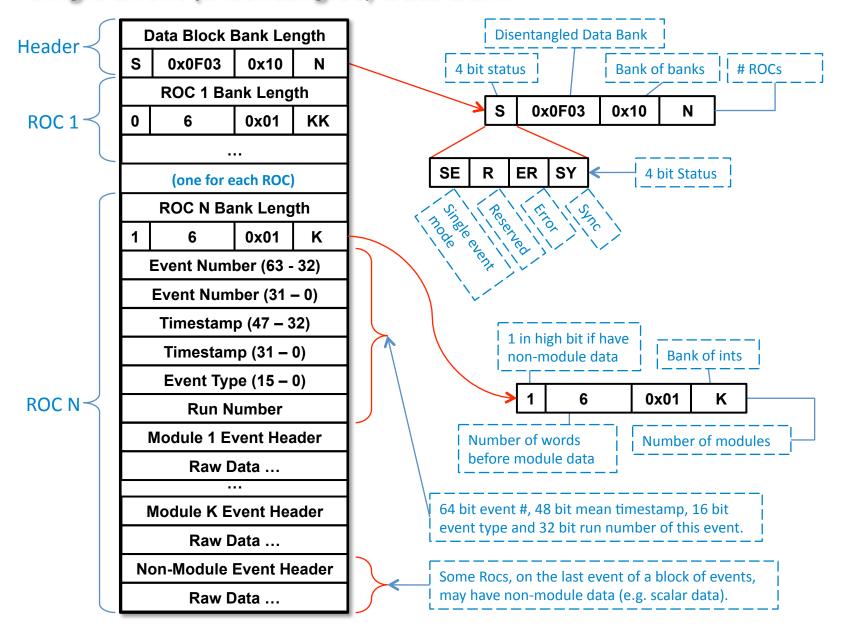

FADC 250

Data Type Values

0 – block header 7 – pulse integral 1 – block trailer 8 – pulse time

2 – event header 9 – streaming raw data 3 – trigger time 9 – streaming raw data 10 – 12 user defined

4 – window raw data 13 – event trailer (debug only)

5 – window sum 14 – data not valid (empty module)

6 – pulse raw data 15 – filler (non-data) word

Block Header Word Format

Bits	Value	Comment
31	1	This is a type defining word
30 – 27	0	Data type = block header
26 – 22	Slot ID	Set by VME64 backplane
21 – 14	Event #	Number of events in block
13 – 12	Module Type	0=FADC250, etc.
11-0	Event block #	Used to align block when building events

General Data Word Format

31st bit	Bits	Usage
1	30 - 27	4-bit data type (see chart)
1	26 - 0	Data type dependent data payload
0	30-0	Data payload using last defined data type

Block Trailer Word Format

Bits	Value	Comment
31	1	This is a type defining word
30 – 27	1	Data type = block trailer
26 – 22	Slot ID	Set by VME64 backplane
21-0	Total # of words in block of events	Number of 32 bit words in block

Event Header Word Format

Bits	Value	Comment
31	1	This is a type defining word
30 – 27	2	Data type = event header
26 – 22	Slot ID	Set by VME64 backplane
21 – 20	Module type	0=FADC250, etc.
19 – 0	Trigger number	ADC processing chip #